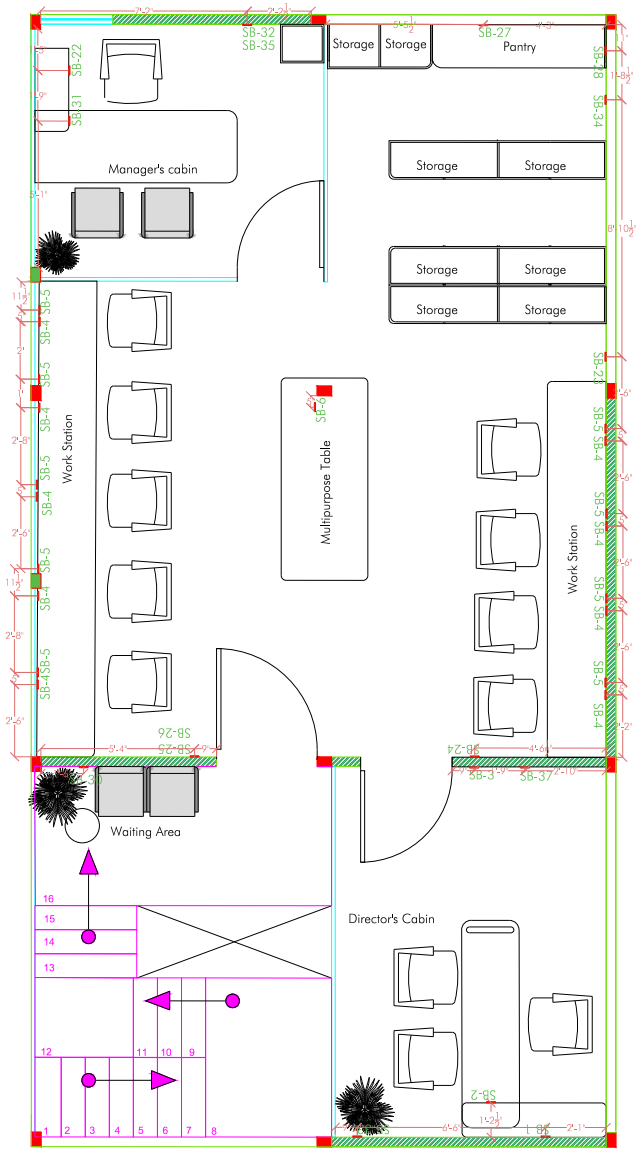


SB-1: 8M @ 2' - 16A SOCKET-2, 16A SOCKET-2, 2 WAY CEILING LIGHT-2, 25A AC SWITCH-1

SB-2: 6M @ 0' - 6A SOCKET-2, 6A SOCKET-1(IN POP-UP BOX), LAN CABLE-1

SB-3: 8M @ 4' - 2 WAY-LIGHT SWITCH-2, 25A AC SWITCH-1, 6A SOCKET-1, SWITCH-2

SB-4: 8M @ 2' - 6A SOCKET-2, 16A- SOCKET-1, SWITCH-2

SB-5: 2M @ 2' - LAN CABLE-2

SB-6: 6M @ 0' - 6A SOCKET-2, 6A SWITCH-1(IN POP-UP BOX), LAN CABLE-1

SB-22: 6M @ 2' - 16A SOCKET-1, 16A SWITCH-1, 6A Socket-1, 6A SWITCH-1

SB-23: 8M @ 4' - LIGHT SWITCH-2, Hanging light-1, 6A SOCKET-1, SWITCH-1, WARDROBE Switch-1

SB-24: 6M @ 2' - 25A AC SWITCH-1, 6A SOCKET-1, 6A SWITCH-1

SB-25: 6M @ 2' - 25A AC SWITCH-1, 6A SOCKET-1, 6A SWITCH-1

SB-26: 8M @ 4' - 6A SOCKET-1, 6A SWITCH-1, CEILING LIGHT SWITCH-3, 2 way Manager Cabin ceiling light-1

SB-27: 8M @ 4' - 6A SOCKET-1,6A SWITCH-1, CEILING LIGHT SWITCH-1, COUNTER LIGHT-1, 16A SOCKET-1, 16A SWITCH-1

SB-28: 6M @ 2' - 6A SOCKET-1,6A SWITCH-1, 16A SOCKET-1, 16A SWITCH-1

SB-30: 8M @ 2' - 6A SOCKET-1, 6A SWITCH-1, FAN-1, REGULATOR-1, LIGHT-1, LOGO LIGHT-1

SB-31: 6M @ 0'- 6A SOCKET-2, 6A SOCKET-1(IN POP-UP BOX), LAN CABLE-1

SB-32: 6M @ 4' - 6A SOCKET-1, 6A SWITCH-1, 2 WAY CEILING LIGHT-2

SB-33: 3M @ 1'6" - 6A SOCKET-1, 6A SOCKET-1(for standing fan)

SB-34: @ 4' - 4 WAY TPN DB

SB-35: 2M @ 1'6' - 25A AC SWITCH-1

SB37: 4M @4' - 6A socket-1, RJ45,HDMI

DATE	REVISION	BY

Key Plan :

PROJECT : 001

CLIENT :
Mr. RISHAV

DRAWING TITLE :
SWITCH PLAN

SCALE : 1:100

VERSION : 01

DATE : 24-11-2025

DRAWN BY :
JATIN KUMAR

Checked BY :
Ar. AYUSHI JALAN

studio intange

Email : intange.business@gmail.com
Ar. Ayushi Jalan
+91-9833877050